

FPUP 92038E-A

FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

Type 3 MHNGVD 1-1-92 ✓

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME Elias Ayon		POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 17440 W. Waterman		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) Lot 132, Blanco Estates		
CITY Marana,	STATE AZ.	ZIP CODE 85653

SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
Provide the following from the proper FIRM (See Instructions):					
1. COMMUNITY NUMBER 040073	2. PANEL NUMBER 955	3. SUFFIX B	4. DATE OF FIRM INDEX 2/15/83	5. FIRM ZONE A3	6. BASE FLOOD ELEVATION (in AO Zones, use depth) 1899.0

Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): ☒ NGVD '29 ☐ Other (describe on back)
For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: _____ feet NGVD (or other FIRM datum—see Section B, Item 7).

SECTION C BUILDING ELEVATION INFORMATION	
Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level: <u>1</u> .	
a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of <u>1189.9</u> feet NGVD (or other FIRM datum—see Section B, Item 7). <i>ELV. TO BOTTOM OF 1-BRM</i>	
b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram is at an elevation of _____ feet NGVD (or other FIRM datum—see Section B, Item 7).	
c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is _____ feet above <input type="checkbox"/> or below <input type="checkbox"/> (check one) the highest grade adjacent to the building.	
d). FIRM Zone AO. The floor used as the reference level from the selected diagram is _____ feet above <input type="checkbox"/> or below <input type="checkbox"/> (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Unknown	

Indicate the elevation datum system used in determining the above reference level elevations: ☒ NGVD '29 ☐ Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)

Elevation reference mark used appears on FIRM: ☒ Yes ☐ No (See Instructions on Page 4) = *B.M. RM-217 ELV.: 1920.91*

The reference level elevation is based on: ☒ actual construction ☐ construction drawings

(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)

The elevation of the lowest grade immediately adjacent to the building is: 1189.6 feet NGVD (or other FIRM datum—see Section B, Item 7).

SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: _____ feet NGVD (or other FIRM datum—see Section B, Item 7).	
Date of the start of construction or substantial improvement _____	

SPACE #2

FPUP: # 92-38E Date Issued: 2-5-92

HM. = 682-5984

Cell. = 256-4934


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data.
I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

ALFONSO TORRES RLS 15342
CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal)
SURVEY MANAGER LANDMARK
TITLE COMPANY NAME
300 N MAIN AVE TUCSON AZ. 85701
ADDRESS CITY STATE ZIP
Alfonso Torres 7-31-02 628-1382
SIGNATURE DATE PHONE




Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: Pima County Floodplain and Erosion Hazard Management Ordinance requires in Article X that the bottom of the structural frame for a manufactured home or building be a minimum of one foot above the base flood elevation listed in item 6 of Section B of this form.
The top of the referenced floor, based on actual construction is to be a minimum of two and one half (2-1/2) feet above the base flood elevation. The top of the referenced floor elevation based on actual construction is to be entered at item 2(a) of Section C of this form. This elevation certificate is to be certified in Section E. When completed a copy of this form is to be returned, within seven days of placement of the manufactured home or building, to Pima County Floodplain Management Section, 201 N. Stone 4th floor, Tucson, AZ. 85701 Phone 740-6350.

NOTE BOTTOM OF I-BEAM AT BASE FLOOD ELEV. plus = 0.1'

BM = RM 217 ELEV. = 1920.91

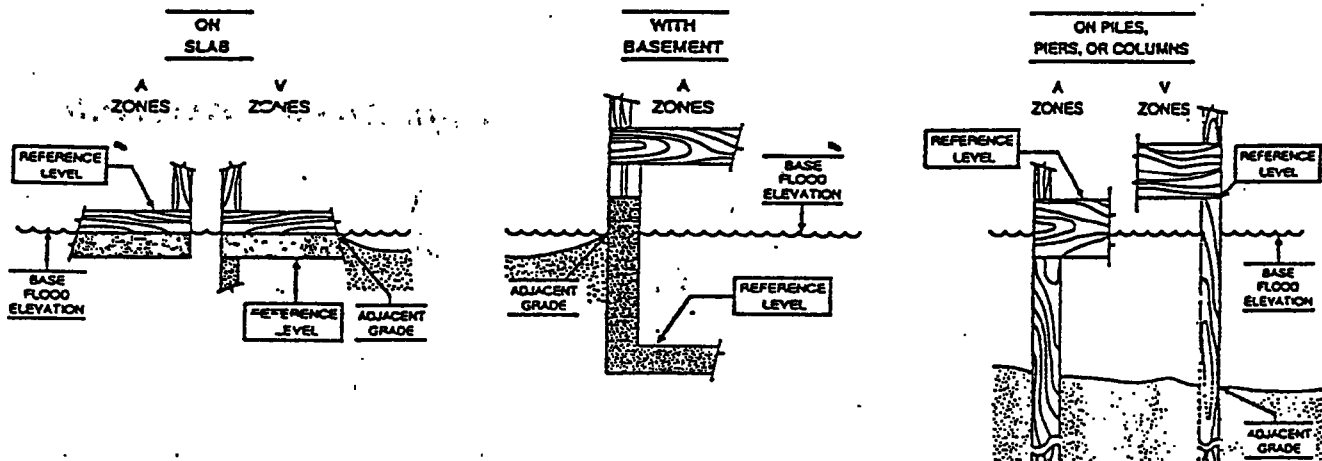

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.