

Type 2 CHDAG

93-322

Instructions for completing this form can be found on the following pages

SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

7 Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE) ☐ NGVD '29 ☐ Other (describe on back)

8 For Zones A or V where no BFE is provided on the FIRM and the community has established a BFE for this building site, indicate the community's BFE feet NGVD (or other FIRM datum—see Section B Item 7)

1 Using the Elevation Certificate Instructions indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 1

2(a) ~~FIRM Zones A1-A30-AE-A11 and A (with BFE) - The top of the reference level floor from the selected diagram is at an elevation of 1-1-1-1-1-1 feet NGVD (or other FIRM datum see Section B, Item 7).~~

(b) ~~FIRM Zones V1-V30-VE and V (with BFE) - The bottom of the lowest horizontal structural member of the reference level from the selected diagram is at an elevation of 1-1-1-1-1-1 feet NGVD (or other FIRM datum see Section B, Item 7).~~

(c) FIRM Zone A (without BFE) The floor used as the reference level from the selected diagram is feet above ☐ or below ☐ (check one) the highest grade adjacent to the building

(d) FIRM Zone AO The floor used as the reference level from the selected diagram is feet above ☐ or below ☐ (check one) the highest grade adjacent to the building If no flood depth number is available is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? ☒ Yes ☐ No ☐ Unknown

3 Indicate the elevation datum system used in determining the above reference level elevations ☐ NGVD 29 ☐ Other (describe under Comments on Page 2) (NOTE If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2)

4 Elevation reference mark used appears on FIRM ☐ Yes ☒ No (See Instructions on Page 4)

5 The reference level elevation is based on ☒ actual construction ☐ construction drawings
(NOTE Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction A post-construction Elevation Certificate will be required once construction is complete)

6 ~~The elevation of the lowest grade immediately adjacent to the building is 1-1-1-1-1-1 feet NGVD (or other FIRM datum see Section B Item 7).~~

1 If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is 111111 feet NGVD (or other FIRM datum—see Section B, Item 7).

93-322

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor engineer or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30 AE AH A (with BFE) V1-V30 VE and V (with BFE) is required Community officials who are authorized by local law or ordinance to provide floodplain management information may also sign the certification In the case of Zones AO and A (without a FEMA or community issued BFE) a building official a property owner or an owner's representative may also sign the certification


Reference level diagrams 6 7 and 8 Distinguishing Features-If the certifier is unable to certify to breakaway/non breakaway wall enclosure size location of servicing equipment area use wall openings or unfinished area Feature(s) then list the Feature(s) not included in the certification under Comments below The diagram number Section C Item 1 must still be entered

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available
I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code Section 1001

Dan C Phillips B-092540
CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal)
Research Survey & Design Builders
TITLE COMPANY NAME
2881 W. Main Verde Pl Tucson AZ 85791
ADDRESS CITY STATE ZIP
Dan Phillips 10/10/93 444-2828
SIGNATURE DATE PHONE

Copies should be made of this Certificate for 1) community official, 2) insurance agent/company, and 3) building owner

COMMENTS This completed certificate is to be returned to Pima County Floodplain
Management Section, 201 N Stone 4th floor Tucson, AZ 85701 prior to B2/B3 inspection

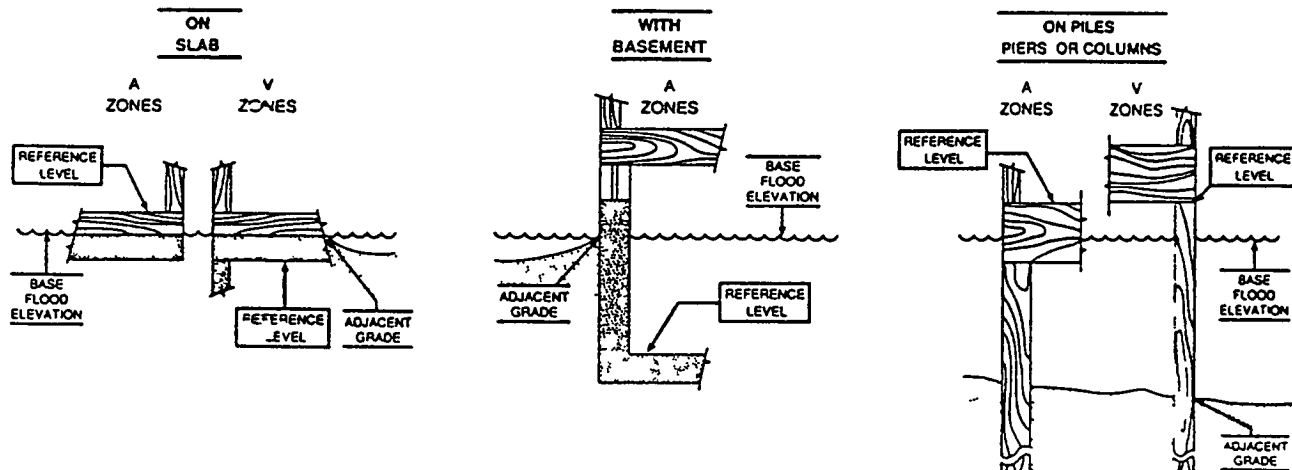

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones
Elevations for all A Zones should be measured at the top of the reference level floor
Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member