8-3178-81 -1139E

ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

Type 1 MHDAG

AT ENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages. SECTION A PROPERTY INFORMATION FOR INSURANCE COMPANY USE POLICY NUMBER BUILDING OWNER'S NAME Sun and Shield Baptist Church STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER COMPANY NAIC NUMBER 8811 W. Avra Valley Rd. OTHER DESCRIPTION (Lot and Block Numbers, etc.) Milligans Acres Lot 1 ZIP CODE CITY 85653 Marana SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Provide the following from the proper FIRM (See Instructions): 6. BASE FLOOD ELEVATION (in AO Zones, use depth) 4. DATE OF FIRM INDEX 5. FIRM ZONE 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 040073 995 D 9/30/92 A0 7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: 1-1-1-1-1 feet NGVD (or other FIRM datum-see Section B, Item 7) SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 2(a). FIRM-Zones A1-A30, AE, AH, and A (with-BFE). The top-of the reference level-fleer from the selected diagram is at an elevation of L___L_foot NGVD (or other FIRM datum-see Section B, Item 7). (b), FIRM-Zones-V1-V00-VE, and V (with-BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of LLLLL feet NGVD (or other FIRM datum-see Section B, Item-7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is . . . feet above . or below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is $\square Z$. \square feet above \square or below \square (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? 🔲 Yes 🔲 No 🗷 Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: X NGVD '29 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4) 5. The reference level elevation is based on: X actual construction Construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) Section B. Itom 7). SECTION D COMMUNITY INFORMATION 1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section 6, Item 1

2. Date of the start of construction or substantial improvement FEMA Form 81-31, MAY 90 🙏

REPLACES ALL PREVIOUS EDITIONS 93-398 E

is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest-

floor"-as defined by the ordinance is: - - - - - - - teet NGVD (or other FIRM datum-see Section B, Item 7).--

SEE REVERSE SIDE FOR CONTINUATION


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seat)	
Steven Morris		
TITLE	COMPANY NAME	RAPTIST CHURCH
PASTOR	SUN and SHIELD E	STATE ZIP
ADDRESS	AAA QA /A	AZ 85653
8811 W. AYRA VALLEY RD	MARANA DATE	PHONE
SIGNATURE A MARTO	1-4-94	662 -682-3423
Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.		
Pima County Floodalais	n and Erosion Hazard Managem	ent Ordinance 1988-FC2 in
Article X requires the bottom of	the structural frame of a mai	nufactured home to be a
minimum of one foot above the base	e flood elevation. For "A" of	or "AO" Zones Fina County
requires the manufactured home flo	on reference level to be a l	minimum of one and one half
feet above the bottom of the structured nome III	otunal frame elevation which	equals two and one half feet
above the base flood elevation as	listed in item 6 of Section	B of this form. This
elevation certificate is to be cer	etified in Section F A con	v is to be returned within
seven days of placement of the man	nufactured home, to Pima Cou	nty Floodplain Management
Section, 201 N. Stone 4th floor,	Tueson, AZ, 85701 - Phone	e 740-6350
becoron, 201 N. Booke 4011 11001,		• •

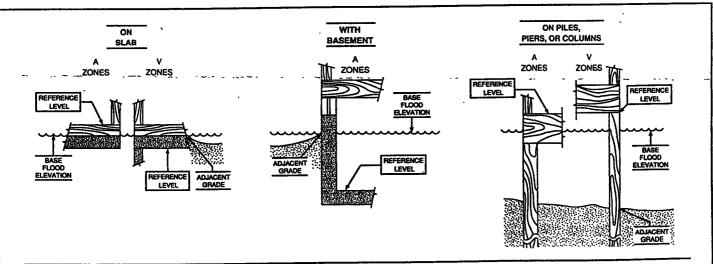

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.