O.M.B. NO. 3067-0077 Expires May 31, 1996

FPUP 95-549E-A ELEVATION CERTIFICATE FEDERAL EMERGENCY MANAGEMENT AGENCY

Type 1 MHDAG

Date Issued: 6/20/96 NATIONAL FLOOD INSURANCE PROGRAM ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages. FOR INSURANCE COMPANY USE SECTION A PROPERTY INFORMATION POLICY NUMBER BUILDING OWNER'S NAME COMPANY NAIC NUMBER STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER WEST CORONA OTHER DESCRIPTION (Lot and Block Numbers, etc.) STATE CITY TUCSON SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Provide the following from the proper FIRM (See Instructions): 6. BASE FLOOD ELEVATION 5. FIRM ZONE 3. SUFFIX 1. COMMUNITY NUMBER 2. PANEL NUMBER 2810 040073 7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: LIIIII foot NGVD (or other FIRM datum see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, Indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level. 2(a). FIRM Zones A1-A80, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation. of !!! feet NGVD (or other FIRM datum see Section B, Item 7). (b). FIRM-Zones V1-V30, VE, and V (with BFE): The bottom of the lewest herizontal structural member of the reference level from the selected diagram, is at an elevation of Lilling foot NGVD (or other FIRM datum-see Section B, Item 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is 121.76 feet above 200 or below i (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is LLL.L. feet above C or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? 

Yes 

No 

Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: X NGVD 29 Cher (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: 

Yes 
No (See Instructions on Page 4) 5. The reference level elevation is based on: 🖾 actual construction 🔲 construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) 6. The elevation of the lowest grade immediately adjacent to the building is: L\_\_\_\_\_\_feet NGVD (or other FIRM datum-see Section B, Item 7). SECTION D COMMUNITY INFORMATION

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C; Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest

floor" as defined by the ordinance is: L\_\_\_\_\_ feet NGVD (or other FIRM datum-see Section B, Item 7).

2. Date of the start of construction or substantial improvement.


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to sertify elevation information when the elevation information for Zones A1 A30, AE, AH, A (with BFE),V1 V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones A0 and A (without a EEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification:

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

		LICENSE NUMBER (or Affix Seal)		
TITLE		COMPANY NA	ME	
ADDRESS 77	5. W. Gorong	n Rd. Turso	n	17- 8574
SIGNATURE -	to & Valenzeel	la	<sup>97</sup> -31-97	PHONE 578-7426
Coples shou	ild be made of this Certifica	ate for: 1) community officia	al, 2) insurance agent/com	pany, and 3) building owner.
COMMENTS	requires the bottom of above the base flood home floor reference structural frame eleva	of the structural frame of elevation. For "A" or " elevel to be a minimum	a manufactured home AO" Zones Pima Cour of one and one half and one half feet above	nance 1994-FC2 in Article XI to be a minimum of one foot aty requires the manufactured feet above the bottom of the te the base flood elevation as

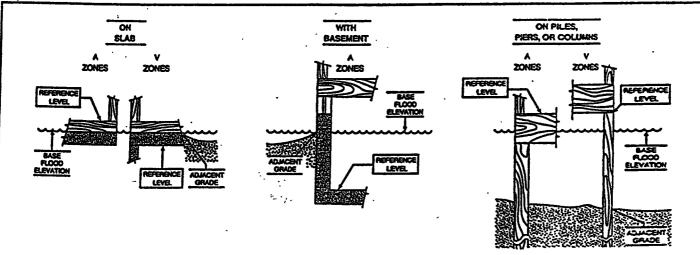

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.