FPUP . 7-671E-A

ELEVATION CERTIFICATE

O.M.B. NO. 3067-0077 Expires May 31, 1996

Date Issued: 1-25-96

EELAA E 01 21 AAAV 02

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

Type 1 MHDAG

SEE DEVEDSE SIDE EOD CONTINHIATIONI

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

							
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE		
BUILDING OWNER'S NAME John Leonard					POLICY NUMBER		
STREET ADDRESS (Including Ap ろもろきし		COMPANY NAIC NUMBER					
OTHER DESCRIPTION (Lot and	` \ \ -			s /9	T /5 R/3		
Tueso-				STATE 2	ZIP CODE		
	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION			
rovide the following from t	ne proper FIRM (See	Instructions):					
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION		
040073	2810	_	9-6-99	A	(in AO Zones, use depth)		
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) Indicate the elevation datum system used on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE:							
SECTION C BUILDING ELEVATION INFORMATION							
c). FIRM Zone A (without below (check one)	/E, and V (with BFE). s at an elevation of L BFE). The floor used the highest grade ad oor used as the refen adjacent to the buildi dance with the comm um system used in de 2 2). (NOTE: If the e 3, Item 7], then conven	The bettem e as the referent in the business level from the business level fr	f the lewest herizental str- feet NGVD (or other FIR) ce level from the selected uilding. In the selected diagram is depth number is available ain management ordinance above reference level eleval	M datum see Se d diagram is diagram is feet at a, is the building's ac? Ves vations: X NGV	etion B, Item 7). See above or below (elleck s lowest floor (reference) No Ulnknown D '29 Other (describe ent than that used on		
Elevation reference mark	used appears on FIR	M: 🗌 Yes 🛚	No (See Instructions on	Page 4)			
The reference level elevation is based on: X actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)							
The elevation of the lowes Section B, Item 7).	st grade immediately a	adjacent to the	building is:	ll.feet NGVD (or other FIRM datum-see		
SECTION D COMMUNITY INFORMATION							
If the community official re is not the "lowest floor" as floor" as defined by the ord Date of the start of constru	defined in the commi	unity's floodplai	in management ordinanc e	e, the elevation o	f the building's "lowest		

DEDLACES ALL DOCAMOLIS EDITIONIS

. (1)

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1 A30, AE, AH, A (with BFE), V1 V30, VE, and V (with BFE) is required.

Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification:

In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.


I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	AME LICENSE NUMBER (or Affix Seal)						
THE	COMPANY NAME		Aciz	85741			
ADDRESS JETIKU	/sim	1-25196	STATE 8308	242 242			
SIGNATURE John & Le	mand	DATE	PHONE				

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS

Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone 4th floor, Tucson, AZ 85701. Phone 740-6350.

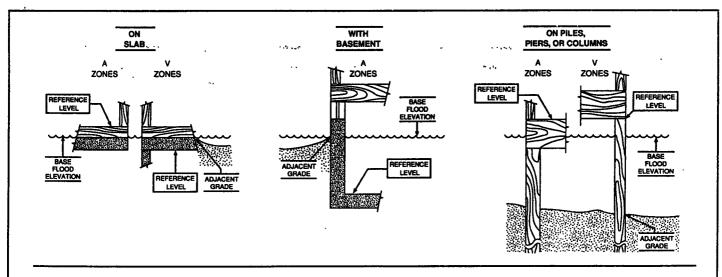

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.