4世界第一周一切理论

FPUP: #

ELEVATION CERTIFICATE FEDERAL EMERGENCY MANAGEMENT AGENCY

O.M.B. NO. 3067-0077 Expires May 31, 1996

Type 3 MHNGVD

Date Issued: 3-08-96

NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR)

| | | | form can be found on the | <u>-</u> | | |
|---|---|---|---|---|--|--|
| • | SECTION A PRO | OPERTY INFO | ORMATION | | FOR INSURANCE COMPANY USE | |
| BUILDING OWNER'S NAME TODO WILLIAMS | | | | | POLICY NUMBER | |
| STREET ADDRESS (Including Ap | (| COMPANY NAIC NUMBER | | | | |
| OTHER DESCRIPTION (Lot and E | SlockNumbers, etc.) | | SPACE # 2 | | | |
| LOT 1 | HUNTER . | انجهن | vision # 2 | s 28 | T// R/O | |
| TUESON STATE | | | | STATE | AZ SSUS | |
| | SECTION B FL | OOD INSUR | ANCE RATE MAP (FIRM) | INFORMATION | | |
| rovide the following from th | ne proper FIRM (See | Instructions): | | | | |
| 1. COMMUNITY NUMBER | 2. PANEL NUMBER | 3. SUFFIX | 4. DATE OF FIRM INDEX | 5. FIRM ZONE | 6. BASE FLOOD ELEVATION | |
| 040073 | 955 | <u>_</u> | 9-30-92 | AE | (in AO Zones, use depth) | |
| . For Zones A or V, where | no BFE is provided o | n the FIRM, a | | ablished a BFE fo | Other (describe on back r this building site, indicate | |
| and definitionity of Different | | · · · · · · · · · · · · · · · · · · · | | | · · · · · · · · · · · · · · · · · · · | |
| | SECTION | ON C BUILD | ING ELEVATION INFORM | IATION | | |
| one) the highest grade level) elevated in accordance. Indicate the elevation date | the highest grade ac oor used as the refer adjacent to the build dance with the comn um system used in de | ijacent to the beence level from ing. If no flood nunity's floodp etermining the | ouilding.— m the selected diagram is d-depth number is available lain management ordinand above reference level ele | feet abe, is the building's pe? Yes I NGV | ove or below (check s lowest floor (reference No Unknown D'29 Other (describe | |
| the FIRM [see Section E equation under Comment | 3, Item 7], then conve ts on Page 2.) | rt the elevatio | m used in measuring the ensine to the datum system us | sed on the FIRM a | and show the conversion | |
| . Elevation reference mark | · · · | | · | | | |
| case this certificate will on will be required once cons | ion drawings is only t ily be valid for the but truction is complete.) | valid if the build ilding during th | ding does not yet have the ne course of construction. | reference level f A post-constructi | on Elevation Certificate | |
| The elevation of the lower Section B, Item 7). | st grade immediately | adjacent to th | e building is: 1 9 0 1 | feet NGVD (| or other FIRM datum-see | |
| • | SE | CTION D CO | OMMUNITY INFORMATIO | N | | |
| is not the "lowest floor" as | defined in the commercial dinance is: | nunity's floodp | lain management ordinand NGVD (or other FIRM datu | e, the elevation c | ficated in Section C, Item 1. If the building's "lowest ; Item 7). | |

SECTION E CERTIFICATION

Se Brown Mental

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property ewner, or are ewner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.


I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data is understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 100

| • | | | 148711 | 182018 |
|----------------------|-------------|-----------------------------|-------------------------|----------|
| CERTIFIER'S NAME | | LICENSE NUMBER (or Affix Se | an 1: 21 | SERI. JA |
| ROBERT J. JEDINAK | | | A SIL OF DE | DINAK A |
| TITLE | , COMPANY I | NAME | | |
| PRESIDENT | VEDINAK, | INC. | ્રેટરે | NA U |
| ADDRESS | CITY | | STATE | ZIP |
| 700 W PRINCE, #100 | TUCSON | | ARIZONA | 85705 |
| SIGNATURE Port Which | | 5/1/96 DATE | PHONE 620 - 088-3313 | <u> </u> |
| | | | ',', | |

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

Pima County Floodplain and Erosion Hazard Management Ordinance requires in Article XI that the bottom of the structural frame for a manufactured home or building be a minimum of one foot above the base flood elevation listed in item 6 of Section B of this form. The top of the referenced floor, based on actual construction is to be a minimum of two and one half (2-1/2) feet above the base flood elevation. The top of the referenced floor elevation based on actual construction is to be entered at item 2(a) of Section C of this form. This elevation certificate is to be certified in Section E. When completed a copy of this form is to be returned, within seven days of placement of the manufactured home or building, to Pima County Floodplain Management Section, 201 N. Stone 4th Floor, Tucson, AZ 85701. Phone 740-6350

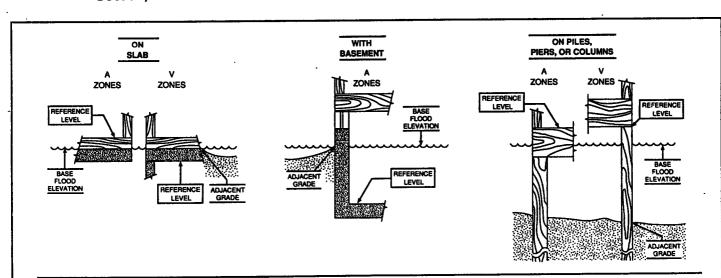

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.