## UP OI- AL-IDOF-A

2900-38-9092 O.M.B. NO. 3067-0077 Expires May 31, 1996 ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement of the sused only to provide elevation information necessary to ensure compliance with applicable community fleedplain management or differences, to determine the proper insurance premium rate, and/or to support a request for a Letter of Management or Revision LOMA or LOM Instructions for completing this form can be found on the found on the support of the support Skype 4 CHNGVD ment or Revision LOMA or LOMR). SECTION A PROPERTY INFORMATION NCE COMPANY USE PAUL J. RAMIREZ + TINA MEAD STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg, Number) OR P.O. ROUTE AND BOX NUMBER COMPANY NAIC NUMBER 10,905 EAST TANQUE VERDE ROAD SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION 4. DATE OF FIRM INDEX 5. FIRM ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth) 8-2-95 26/0,0 7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): X NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate feet NGVD (or other FIRM datum-see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 2611 feet NGVD (or other FIRM datum-see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of \_\_\_\_\_\_ feet NGVD (or other FIRM datum-see Section B, Item 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is \_\_\_\_\_ feet above \_\_\_ or below [...] (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is Light feet above or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Tyes No Tynknown 3. Indicate the elevation datum system used in determining the above reference level elevations: 🗵 NGVD '29 🔲 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion 4. Elevation reference mark used appears on FIRM: X Yes No (See Instructions on Page 4) (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate 6. The elevation of the lowest grade immediately adjacent to the building is: 12610.5 feet NGVD (or other FIRM datum-see SECTION D COMMUNITY INFORMATION

-	LIMI_OL	76 1100	,,

FPUP: #

**BUILDING OWNER'S NAME** 

TUCSON

1. COMMUNITY NUMBER

the community's BFE:

040073

**ELEVATION CERTIFICATE** 

Date Issued:

OTHER DESCRIPTION (Lot and Block Numbers, etc.)

Provide the following from the proper FIRM (See Instructions):

describes the subject building's reference level 1

2. PANEL NUMBER

1670

FEDERAL EMERGENCY MANAGEMENT AGENCY

5. The reference level elevation is based on: X actual construction co will be required once construction is complete.)

FEMA Form 81-31, MAY 93

Section B, Item 7).

equation under Comments on Page 2.)

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section 6, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowestfloor" as defined by the ordinance is: L.L. | feet NGVD (or other FIRM datum-see Section B, Item 7). 2. Date of the start of construction or substantial improvement


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

	TOBERT RELCA LS 5568						
CERTIFIER'S NAM	AE LICENSE NUMBER (or Affix Seal)						
TITLE	COMPANY NAME  COMPANY NAME						
ADDRESS	38 E JUAREZ ST	TUCSON	J :	ARIZONA	85710		
	Sodert Kelch	CITY	7/23/96	STATE 296 5	71P		
SIGNATURE			DATE	PHONE			
Copies should	d be made of this Certificate for: 1) com	munity official, 2) in	surance agent/co	mpany, and 3) building	owner.		
COMMENTS:	This certificate completed in Se Management Section, 201 N. Sto	ctions C and E ione 4th Floor, Tu	s to be returne cson, AZ. 8570	ed to Pima County 01 prior to B2/B3 in	Floodplain		
				-	<del></del>		

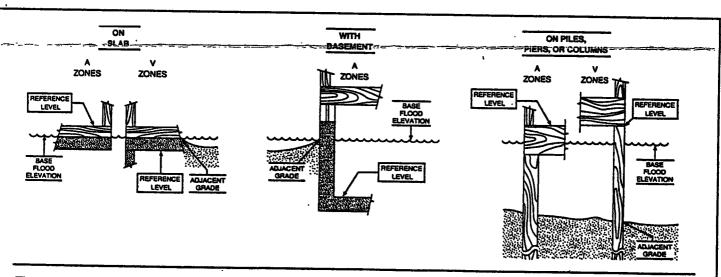

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.