SEE REVERSE SIDE FOR CONTINUATION

PUP: #

FEMA Form 81-31, MAY 93

ELEVATION CERTIFICATE

O.M.B. NO. 3067-0077 Expires May 31, 1996

)ate Issued:

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

Type 2 CHDAG

:

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

STREET ADDRESS (including Act. Unit. Suits and/or Bidg. Number) OR P.O. ROUTE AND BOX NUMBER STREET ADDRESS (including Act. Unit. Suits and/or Bidg. Number) OR P.O. ROUTE AND BOX NUMBER STATE SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Trovide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 040073 Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): \(\Delta \text{NCVD} \)? Indicate the elevation datum system used on the FIRM, and the community has established a BFE the community's BFE: \(\Delta \text{LI} \) \(\Delta \text{fert RM Adturm-see Section B, Item 7} \). SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level \(\Delta \text{LI} \). The bettom of the reference level floor from the celection B, Item 7}. (b). FIRM Zenes 14 1/30, AE, AH, and A (with BFE). The bettom of the lowest horizontal structural member the selected diagram, is at an elevation of \(\Delta \text{LI} \) bettom of the lowest horizontal structural member the selected diagram, is at an elevation of \(\Delta \text{LI} \) bettom of the lowest horizontal structural member the selected diagram, is at an elevation of \(\Delta \text{LI} \) bettom of the lowest horizontal structural member the selected diagram, is at an elevation of \(\Delta \text{LI} \) bettom of the lowest horizontal structural member the selected diagram, is at an elevation of \(\Delta \text{LI} \) feet to one) the highest grade adjacent to the building. (d). FIRM Zene AO. The floor used as the reference level from the selected diagram is \(\Delta \text{LI} \) feet to one) the highest grade adjacent to the building. (d). FIRM Zene AO. The floor used as the reference leve	FOR INSURANCE COMPANY USE			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION TOVIDER DESCRIPTION (Lot and Block Numbers, etc.) SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION TOVIDER TO BUILDING FOR THE PROPER FIRM (See Instructions): 1. COMMUNITY NUMBER 0.40073 1. COMMUNITY NUMBER 0. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 0. ADTE OF FIRM INDEX 5. FIRM ZONE 0. ADTE OF FIRM INDEX 5. FIRM ZONE 1. COMMUNITY NUMBER 1. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 6. FIRM ZONE 7. FOR ZONES A OR V, where no BFE is provided on the FIRM, and the community has established a BFE the community's BFE: 1 feet NGVD (or other FIRM datum—see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level 1. 1. SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level 1. 1. SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level 1. 1. SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions in Indicate the diagram number from the diagrams found on describes the selected diagram is an elevation of the FIRM datum—see Section B, Item 7, Item Convert to the building. If no flood depth number is available, is the building level) elevated in accordance with the community's flood depth number is available, is the building level) elevated in accordance with the community's flood depth number is available, is the building level) elevated in accordance with the community's flood depth number is available, is the building level) elevated in accordance with the community's flood depth number is a	POLICY NUMBER			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION 1. COMMUNITY NUMBER	COMPANY NAIC NUMBER			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Trovide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 040073 1645 1. A DATE OF FIRM INDEX 5. FIRM ZONE 8/2/1995 1. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): MGVD '2 For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level (a) FIRM Zenes A1 A30, AE, AH, and A (with BFE). The top of the reference level fleer from the selected of the selected diagram, is at an elevation of (b) FIRM Zenes A1 A30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member the selected diagram, is at an elevation of (c) FIRM Zenes A1 A30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member the selected diagram, is at an elevation of (d) FIRM Zenes A1 K30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member the selected diagram, is at an elevation of (e) FIRM Zenes A1 K30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member the selected diagram, is at an elevation of (e) FIRM Zenes A1 K30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member the selected diagram, is at an elevation of (e) FIRM Zenes A1 K30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member the selected diagram is (e) FIRM Zenes A1 K30, AE, AH, and V (with BFE). The bottom of the lewest herizontal structural member is available, is the building. (d) FIRM Zenes A1 K30, AE, AH, and V (with BFE). The floor used as the reference level from the selected diagram is Indicate the elevation datum system used in determi	COMPANY NAIO NOMBER			
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION rovide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER	T /3 R /4			
1. COMMUNITY NUMBER 040073 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 040073 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 040073 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 040073 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 040073 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 04007 2. PANEL NUMBER 04007 3. SUFFIX 04. DATE OF FIRM INDEX 04007 2. PANEL NUMBER 04007 3. SUFFIX 0400	ZIP CODE			
1. COMMUNITY NUMBER 040073 Community	SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION			
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '2: For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION	rovide the following from the proper FIRM (See Instructions):			
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): \[\text{NGVD} '\text{ NGVD} ' NGVD	6. BASE FLOOD ELEVATION (in AO Zones, use depth)			
The community's BFE:	(in AO Zones, use depth)			
Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level (a). FIRM Zenes A1 A30, AE, AH, and A (with BFE). The top of the reference level fleer from the select of Heat A30, AE, AH, and A (with BFE). The top of the reference level fleer from the select of Heat A30, AE, AH, and A (with BFE). The bettom of the lewest horizontal structural members the selected diagram, is at an elevation of Heat A30, AE, and V (with BFE). The bettom of the lewest horizontal structural members the selected diagram, is at an elevation of Heat A30, AE, and V (with BFE). The bettom of the lewest horizontal structural members the selected diagram, is at an elevation of Heat A30, AE, AH, and A (with BFE). The bettom of the level from the selected diagram is Heat A30, AE, AH, and A (with BFE). The bettom of the building. (d). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is Heat A30, AE, AH, and A (with BFE). The bettom of the building. (d). FIRM Zone A0. The floor used as the reference level from the selected diagram is Heat A30, AE, AH, and A (with BFE). The building. If no flood depth number is available, is the building level) elevated in accordance with the community's floodplain management ordinance? \begin{array}{ c c c c c c c c c c c c c c c c c c c	Other (describe on back) or this building site, indicate			
Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level (a). FIRM Zenes A1 A30, AE, AH, and A (with BFE). The top of the reference level fleer from the select of First feet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zenes V1 V30, VE, and V (with BFE). The bettem of the lewest herizontal structural member the selected diagram, is at an elevation of feet NGVD (or other FIRM datum—see Cit). FIRM Zene A (without BFE). The floor used as the reference level from the selected diagram is below (check one) the highest grade adjacent to the building. (d). FIRM Zene AO. The floor used as the reference level from the selected diagram is feet a one) the highest grade adjacent to the building. If no flood depth number is available, is the building level) elevated in accordance with the community's floodplain management ordinance? \boxed{X} Yes Indicate the elevation datum system used in determining the above reference level elevations: NG under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is difficate FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM equation under Comments on Page 2.) Elevation reference mark used appears on FIRM: Yes \boxed{X} No (See Instructions on Page 4) The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level case this certificate will only be valid for the building during the course of construction. A post-construction				
The reference level elevation is based on: A actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level case this certificate will only be valid for the building during the course of construction. A post-construction	bove or below (check is lowest floor (reference No Unknown ID 129 Other (describe rent than that used on			
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level case this certificate will only be valid for the building during the course of construction. A post-construc				
,	floor in place, in which ion Elevation Certificate			
The elevation of the lowest grade immediately adjacent to the building is: L.L.L.L.J.feet NGVD Section B, Item 7)	(or other FIRM datum-see			
SECTION D COMMUNITY INFORMATION				
If the community official responsible for verifying building elevations specifies that the reference level in is not the "lewest floor" as defined in the community's floodplain management ordinance, the elevation	of the building's "lowest			
fleer" as defined by the erdinance is: L.L.L.L.L.L.L.L.L.L.L.L.L.L.L.L.L.L.L.), Item 7)			

REPLACES ALL PREVIOUS EDITIONS

49-13-44-67-11/94

SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1—A30, AE, AH, A (with BFE),V1—V30,VE, and V (with BFE) is required.—

Gemmunity efficials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

_ WAYNO Bliott	099244		
CERTIFIER'S NAME	WEL EWTERPR(SU-S		
TITLE 88 S BONANZA	COMPANY NAME. : ! +UCSON	AZ 85748	
ADDRESS Van	city 8-26-96	STATE ZIP > 722 3193	
SIGNATURE	DATE	PHONE	
Copies should be made of this Certificate for:	1) community official, 2) insurance agent/compa	ny, and 3) building owner.	
COMMENTS: This certificate completed Management Section, 201	in Sections C and E is to be returned t N. Stone 4th Floor, Tucson, AZ. 85701 p	o Pima County Floodplain prior to B2/B3 inspection.	

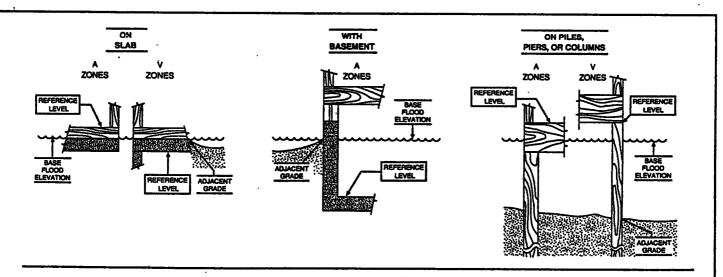

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.