FPUP_	97-	1025	-A
1101-	7 1 (1020	, (
$-\Omega t$			
1111			
1 77			

ELEVATION CERTIFICATE

O.M.B. NO. 3067-0077 Expires May 31, 1996

Type 1 MHDAG

Date Issued: 3-3-97

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	instructions for compl	leting this	form can be found on t	he following pa	ges.	
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME Wheeler, Phoenix + Corol Helle:					POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg, Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and	Block Numbers, etc.)			s 3 3	THR 11	
TUCSOU				STATE AZ	85743	
and the same of th	SECTION B FLOO	D INSURA	NCE RATE MAP (FIRM)	INFORMATION	, , , , , , , , , , , , , , , , , , ,	
Provide the following from t	he proper FIRM (See Inst	tructions):			The second secon	
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
040073	1600	B	84/97		0.5	
					Other (describe on back)	
8. For Zones A or V, where the community's BFE: L	•		d the community has est FIRM datum—see Section		or this building site, indicate	
and community 5- BrE. L						
	SECTION C	BUILDIN	IG ELEVATION INFORM	AIJON		
(b). FIRM Zones V1 V30, V the selected diagram, i (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fi one) the highest grade	s at an elevation of Liber BFE). The floor used as the highest grade adjacer oor used as the reference adjacent to the building. Idance with the community	the reference of the but to the but to the but to flood of the but	the lewest horizontal strated to the lewest horizontal strated feet NGVD (or other FIR) to level from the selected diagram is depth number is available in management ordinance.	M-datum-see Soldiagram is Lilling feet at a line building e? I Yes I	potion B, Item 7). 1	
under Comments on Page the FIRM [see Section B equation under Comment	e 2). (NOTE: If the elevat , Item 7], then convert the s on Page 2.)	tion datum e elevation: 	used in measuring the ele to the datum system us	evations is diffe ed on the FIRM	rent than that used on	
4. Elevation reference mark	used appears on FIRM: [☐ Yes 🏻	No (See Instructions on	Page 4)	,	
5. The reference level elevat (NOTE: Use of constructi case this certificate will onl will be required once const	on drawings is only valid i y be valid for the building	if the buildi	ng does not yet have the	reference level	floor in place, in which ion Elevation Certificate	
6. The elevation of the lowes Section B, Item 7).	t grade immediately adjac	cent to the	building is:	LJ:feet NGVD-	or other FIRM datum-see	
	SECTIO	OND COM	MUNITY INFORMATIO	N	The second secon	
If the community efficial re is not the "lowest floor" as floor" as defined by the creations. 2. Date of the start of construing.	defined in the community tinance is:	's floodplai Li feet N C	n management ordinanc e	e , the elevation	of the building's "lowest"	

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to scrify elevation information when the elevation information for Zones A1—A30, AE, AH, A (with BFE), V1—V30, VE, and V (with BFE) is required.

Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification! In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME

LICENSE NUMBER (or Affix Seal)

TITLE

COMPANY NAME

CITY

PO Box 544

The son

SIGNATURE

Wheeler


STATE

ZIP

42

85702

Coples should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

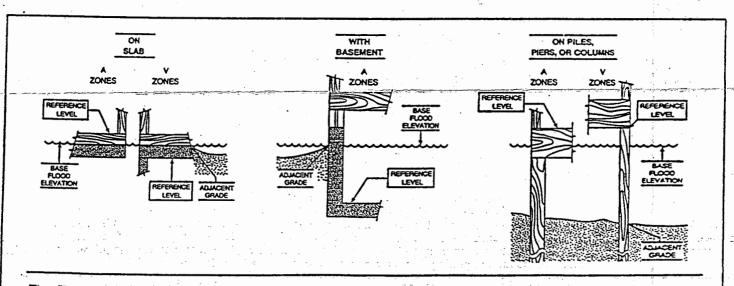

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor.

to all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.