=PI)P	97-178E	_4								
101-										
	<b>€</b>					6171879200				
			CVATIO	N OFFICIO	ATE (6)	O.M.(823) O. 3067-007 Expires May 31, 199				
, ;		er reger can S		N CERTIFICA NCY MANAGEMENT		SS				
	Issued:	- NATI	ONAL FLOO	D INSURANCE PRO	GRAM =	Eype MHDAG				
ATTEN	TION: Use of this of	ertificate does not pro-	vide a waiver o	of the flood insurance pur	rchase red Freme	nt. This long is used only to				
determ	ine the proper insur	ance premium rate, an	id/or to support	with applicable communit t a request for a Letter of form can be found on	Map Amendiner	nt or Revision (LQWX or LOMR)				
		FOR INSURANCE COMPANY USE								
	NG OWNER'S NAME Mc Mast	. •	POLICY NUMBER							
STREE	TADDRESS (Including A インスラ G		COMPANY NAIC NUMBER							
OTHER	DESCRIPTION (Lot and				s <b>346</b>	T/2 R/0				
CITY	cson			**	STATE	21P CODE 8-5747				
		SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM						
Provida	the following from the	he proper FIRM (See I	nstructions):							
1. C	OMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)				
	040073	1560	B	8/2/95	100					
						Other (describe on back)				
				IRM datum-see Section		or the balloting site, indicate				
		SECTIO	N C BUILDIN	G ELEVATION INFORM	IATION					
1 Heina	the Floration Coati			m number from the diag		acco E and E that had				
descri	ibes the subject buil	lding's reference level		- · · ·						
2(a). FIRM Zones A1-A3C, AE, AH, and A (with BFE). The top-of the reference level floor-from the colected diagram is at an elevation of !!!!!!!!										
(b). FIRM-Zones V1-V30, VE, and V (with BFE).—The bottom of the lowest horizontal structural member of the reference level from—										
, the-	the selected diagram, is at an elevation of Li LILL feet NGVD (or other FIRM datum-see Section B, Item 7).									
•	• —			e level from the selected	d diagram is LL	J.∐ feet above ☐ or				
		he highest grade adja		•	/1 /1					
(d). FIR	M Zone AO. The flo	or used as the referen	nce level from t	the selected diagram is	LHJ. 17 feet at	ove or below (check				
· one	the highest grade a	edjacent to the building	g. If no flood d	epth number is available	e, is the building i	s lowest floor (reference				
•		,		n management ordinand						
under (	Comments on Page RM [see Section B,	2). (NOTE: If the ele Item 7], then convert	vation datum e	ised in measuring the el	levations is differ	D '29 Other (describe ent than that used on and show the conversion				
	on under Comments on reference mark u		: 🗌 Yes 🔯	No (See Instructions on	Page 4)	The same of the sa				
5. The ref	erence level elevation	on is based on: 🗵 ac	tual constructi	on $\square$ construction dra	awings					
case thi	: Use of construction is certificate will only equired once constr	be valid for the building	id if the building ng during the d	g does not yet have the course of construction.	reference level f A post-construction	loor in place, in which on Elevation Certificate				
6. The ele		grade immediately ad	jacent to the b	uilding is:	L-feet NGVD (d	or other FIRM datum-see				
		SECT	TON D COM	MUNITY INFORMATION	N.					
1. If the co	mmunity official resp	consible for verifying to	building elevati	ons specifies that the re	eference level ind	licated in Section C, Item 1				
				management ordinance  /D (or other FIRM datur						
		tion or substantial imp		- Constitution of the control		,				

## CERTIFICATION SECTION E

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify olevation. information when the elevation information for Zones A1 A30, AE, AH, A (with BFE), V1 V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification! In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the Information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

TITLE		COMPANY NAME	Л	05-11/2
14225	W Magee	Tueson		85/45
ADDRESS		CITY	STAT	1 02 0000
SIGNATURE	an for	DATE /	PHONE	1082-8788 -
- CIGIOTICALE		/ DAIE /	THONE OY.	<i>293-97</i> 75

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone 4th floor, Tucson, AZ 85701. Phone 740-6350.

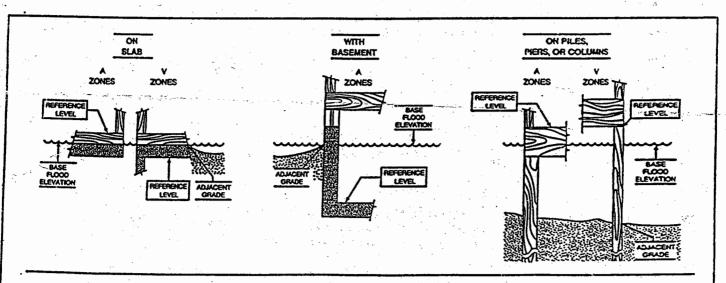

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.