IP 97-515E-A .B. NO. 3067-0077 ELEVATION CERFIFICATE es May 31, 1996 FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM Date Issued: 10/2/47 ATTENTION: Use of this certificate does not provide a waiver of the illouding trance purchase equirement his form is used only to provide elevation information necessary to ensure compliance with applicable community floodystin management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Algorithm to Revision (LOMA) instructions for completing this form can be found on the following pages. SECTION A PROPERTY INFORMATION !! OR MEURANCE COMPANY USE BUILDING OWNER'S NAME POLICY NUMBER EUGENF STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER COMPANY NAIC NUMBER 7150 SOUTH MARSTELLAR KOAD OTHER DESCRIPTION (Lot and Block Numbers, etc.) CITY UCSON SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Provide the following from the proper FIRM (See Instructions): - 1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth) 040073 7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is previded on the FIRM; and the community has established a BFE for this building site, indicate the community's BFE: 1 1 1 1 1 feet NGVD (or other FIRM datum-see Section B, Item 7) SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 5\_. 2(a). FIRM-Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the colocted diagram is at an elevationof :: 1 feet NGVD (or other FIRM datum-see Section B. Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of LillIII feet NGVD (or other FIRM datum-see Section 8, Item 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is 10121. If feet above 12 or below iii (check one) the highest grade adjacent to the building. one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? 🔲 Yes 🔲 No 🗍 Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: X NGVD 29 ... Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FiFIM [see Section B, Item 7], then convert the elevations to the datum system used on the FIFIM and should be compress. equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4) 5. The reference level elevation is based on: X actual construction Construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) Section B, Item 7). SECTION D COMMUNITY INFORMATION 1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: L.L. L. Leet NGVD (or other FIRM datum-see Section B, ttem 7).

2. Date of the start of construction or substantial improvement

## FPUP\_97-515F-B

## SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1—A30, AE, AH, A (with BFE),V1—V30,VE, and V (with BFE) is required.

Community efficials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a properly owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix Seal)	
TITLE	COMPANY NAME	
ADDRESS) HCR Z BX 461	Tucson	STATE STATE ZIR
SIGNATURE CUCLENC (	DATE	PHONE S 20 8 22 1239
	pate for: 1) community official, 2) insurance agent colain and Erosion Hazard Management (	

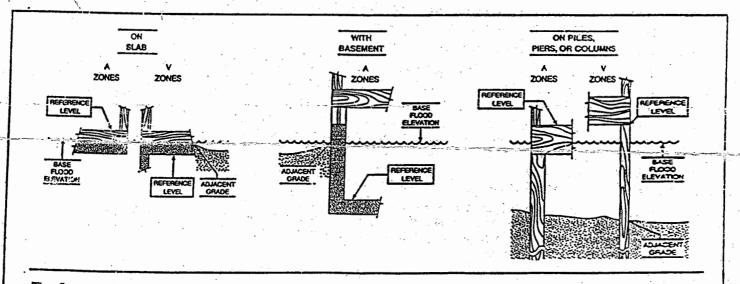

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.