FPUP-97-604E-A NB. NO. 3067 ELEVATION CERTIFICATE FEDERAL EMERGENCY MANAGEMENT AGENCY Date Issued: NATIONAL FLOOD INSURANCE PROGRAM NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA). Instructions for completing this form can be found on the following pages. Extended SECTION A PROPERTY INFORMATION CBA FOR INSURANCE COMPANY LISE BUILDING OWNER'S NAME POLICY NUMBER xtended tmerica STREET ADDRESS (Including Apl., Unit, Suite and or Bidg. Number) OR P.O. ROUTE AND BOX NUMBER COMPANY NAIC NUMBER 4800 Butterfield Bushess Centerniss ZIP CODE برمرحن SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION Provide the following from the proper FIRM (See Instructions): 1. COMMUNITY NUMBER 2. PANEL NUMBER 4. DATE OF FIRM INDEX & BASEIFLOOD ELEVATION 3. SUFFIX 040073 8-19-97 2245 7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD 29 Other (describe on back) 8. For Zones A-or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's-BFE: 1 1 1 1 1 1 ifeet NGVD (or other FIRM datum-see Section B, Item 7). SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, Indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level. 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor-from the colected diagram is at an elevation (b). FIRM-Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of LiillIfeet NGVD (or other FIRM datum-see Section B, Kem 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is ______ feet above ____ or below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is [2]. 2 feet above M or below [(chex one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? 12 Yes 12 No 12 Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: 🖾 NGVD 29 🔲 Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM:

Yes

No (See Instructions on Page 4) 5. The reference level elevation is based on: X actual construction C construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.) 6. The elevation of the lowest grade immediately adjacent to the building is: L_______________________________. Section B. Item 7). SECTION D COMMUNITY INFORMATION 1. If the community efficial responsible for verifying building elevations specifies that the reference level indicated in Section C. Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: [] [] [] feet NGVD (or other FIRM datum-see Section B, Item 7). Date of the start of construction or substantial improvement

FPUP_97-604E-B

SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1 A30, AE, AH, A (with BFE), V1 - V30, VE, and V (with BFE) is required. Gommunity officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

JANSHEED	D. BEHR	9N4	19095	ENIL ENG. S	TATE OF A
CERTIFIER'S NAME			LICENSE NUMBER (or A	ffix Seal)	
HSS. VICE	PRESIDENT			<i>es</i>	
4911 E.	BROADWAY	COMPANY NAM	•	Az	85711
ADDRESS		Lana CITY	11/5/97	750-74	774 ZP
SIGNATURE			DATE	PHONE	
Copies should be mad	e of this Certificate for	: 1) community official	, 2) insurance agen	t/company, and 3) build	ing owner.

This certificate completed in Sections C and E is to be returned to Pima County Floodplain Management Section, 201 N. Stone 4th Floor, Tucson, AZ. 85701 prior to B2/B3 inspection.

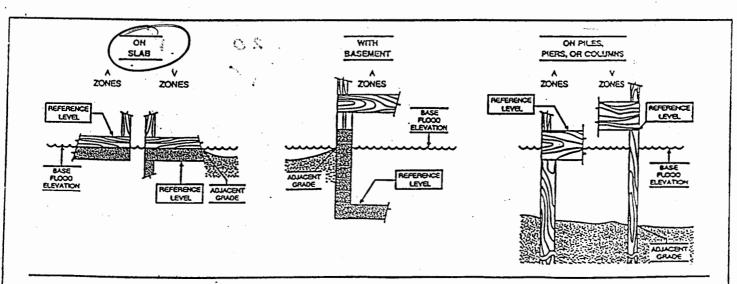

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.