FPUP-98-111E-A

FPUP: # 98-111E

ELEVATION CERTIFICATE

O.M.B. No. 3067-0077 Expires July 31, 1999

Date Issued: 4-22-98 FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

Type 4 CHNGVD

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME RONALD ROBINETTE	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 2700 North Placeta Colad	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) To Co. 114-53-6120 LOTIZ COLONIA TIERRA VERDE T	3 R 15 S 34
TUCSON STAT	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMA	TION
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM Z 04007:3	CONE 6. BASE FLOOD ELEVATION (in AO Zones, use depth) 2573.67
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGV 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a the community's BFE:	BFE-for this building site, indicate
SECTION C BUILDING ELEVATION INFORMATION	. '
 (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural methe selected diagram, is at an elevation of feet NGVD (or other FIRM datum—(c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available, is the building. 	see Section B, Item 7). is feet above or feet above or below (check
level) elevated in accordance with the community's floodplain management ordinance? Yes. Indicate the elevation datum system used in determining the above reference level elevations: under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: X Yes No (See Instructions on Page 4)	NGV 28 K Other (describe
5. The reference level elevation is based on: X actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference case this certificate will only be valid for the building during the course of construction. A post-conwill be required once construction is complete.)	
6. The elevation of the lowest grade immediately adjacent to the building is: 2574.0 feet N Section B, Item 7).	IGVD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	ver and the state of
If the community official responsible for verifying building elevations specifies that the reference is not the "lowest floor" as defined in the community's floodplain management ordinance, the election as defined by the ordinance is.	vation of the building's "lowest

プログライ


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LI	CENSE NUMBER (or Af	fix Seal)	
DONALD J. LOOSE	ARROW L	-AND SURV	EY, /NC.	. 11
PRESIDENT	COMPANY NAME			
3121 E. KLEINDALE,	RD. TUCSON	y	9	AZ. 257/
SIGNATURE	ese	5/22/9	E FZ6	281-2155
Copies should be made of this Certificate for: 1)		2) insurance agen	l/company, and 3	building owner.
COMMENTS: This certificate completed in Floodplain Management Sector to B2/B3 inspection.	n Sections C and E ction, 201 N. Stone	is to be returned Ave., 4th Floor,	to Pima Count Tucson, AZ. 8	y 5701 prior
PURSUANT TO ENGEN	GRING SURUE	Y IN MARK	MCCARTY 1	ANALYSIS
DATED 3-24-98				

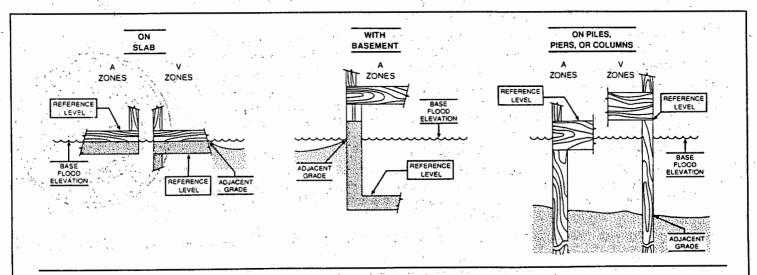

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.