FYUY- 48-441E-A

85/14/1999 11:17 2579141 05/13/1999 16:26 7421887

SUNRISE DES_SHADOWS PAGE 02 PAGE 01

O.M.B. No. 3067-00.

FPUP: # 98-441B Date Issued:

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ANAGEMENT AGENCY Expires July 31, 1999
HANCE PROGRAM TYPE J MEDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMA). You are no required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

CONTRACT TO STATE OF THE STATE					4.5.
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME		POLICY NUMBER			
STREET ADDRESS (Including A)	Tera Lan		OUTE AND BOX NUMBER		COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and		3	A STATE OF THE STA	т 15	R // S 4
CITY 14:50 -				STATE A 2	ZIP COOE S G 735
	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from t	he proper FIRM (See	Instructions):	Market Ma		
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	5. BASE FLOOD ELEVATION (In AO Zones, use depth)
040073	2200	_	8/19/97	AO	1.0 feet
7. Indicate the elevation da	turn system used on t	he FIRM for Ba	se Flood Elevations (BFE): NGVD '29	Other (describe on back)
8. For Zones A or V; where					or this building site, indicate
the community's BFE.	teet N	ld VD (or athe r	FIRM datom-see Suction	D, Itom 7),	
	SECTION	ON C BUILDI	NG ELEVATION INFORM	HOITA	
of	AC. Att. and A (with the NOVD (or other FIF VE, and V (with BFE) is at an elevation of the BFE). The floor used the highest grade as floor used as the refer adjacent to the build ordance with the computation system used in dig 2), (NOTE: If the B, Item 7), then convents on Page 2.)	The top- Not datum see The bottom of the bottom of the better of the bottom of the brence level from the brence level from the bottom of the between the between the between the between the between the bottom of the between the between the bottom of the between the bottom of the bot	Bection B. Item 7): If the lowest horizontal structed NGVD (or other Fifting level from the selected utilities, in the selected diagram is depth number is available ain management ordinant above reference level elem used in management by the elem used in management or the datum system uses to the datum system uses the selected in the selected in the datum system uses the selected in the selec	d diagram is 2 10 feet at a a, is the building ce? Yes 2 vations: X NG blevations is differed on the FIRM	though the tabove of tab
5. The reference level elev- (NOTE: Use of construc- case this certificate will o will be required once con	etion is based on: XX tion drawings is only nly-be valid for the bu	actual construivalid If the build ilding during the	ction construction di	awings reference level	floor in place, In which tion-Elevation Certificate
5. The elevation of the lowe Section B, Item 7)	et grade immediately	-edjacent to the	Suilding to:	- HOLNOVO	(or other FIFIM-datum-see:
	- 51	CTION D CC	MMUNITY INFORMATIO)N	
If the community official is not the "lowest floor" as defined by the case. Oate of the start of const.	rdinance is:	Turnity's floodph	rations specifies that the rations specifies that the rational state of the rational sta	e, the elevation	ndicated in Sestion C, Item 1 of the building's Towest B, Item 7).

SECTION E CERTIFICATION

This cartification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify Information when the elevation information for Zones A1 A30, AC: AH, A (with BFE), V1 V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-II the certifier is unable to certify to breakaway/non-breakaway wall. enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the pertification under Comments below. The diagram number, Section C, Item 1, must still be entered,


I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. Lunderstand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Goger Windt		
Gresident, Qualifying Parti	ICENSE NUMBER (OF ARIX SEST)	Home Sewi
21/2 723rd aug Company NAME	nix	acciona
Togen M Wentt CITY	5/13/99	602-869-8810
SIGNATURE	DATE	HONE

Copies should be made of this Certificate for: 1) community official, 2) Insurance egent/company, and 3) building owner.

(Fe 98-44/

Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima Will thre County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-6350.

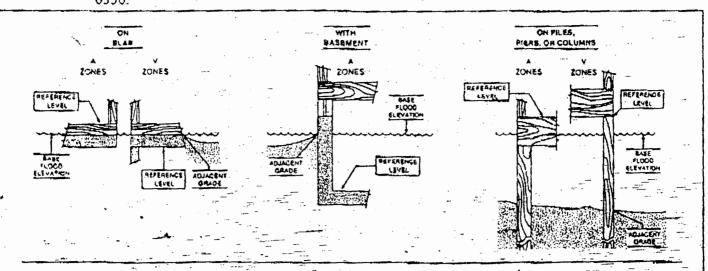

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.