FPUP 1 98-25-98 Date Issued:

pote: Bottom of Trailer from

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999 Type 1 MHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
Building Owner's NAME. Duttle Richard	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 5555 South Stefan Dr	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) 265-59-6110	3 R 10= S 26
STATE AT	ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATI	ON
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZON 040073 255 275 275 275 275 275 275 275 275 275	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
V. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD B. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BF the community's BFE. Like Like Like 1 feet NGVD (or other FIRM datum-see Section B, Item 7)	
SECTION C BUILDING ELEVATION INFORMATION	tier in the second
Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found of describes the subject building's reference level 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the second feet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural mem the selected diagram, is at an elevation of	ber of the reference level from Bested Gramming at an elevation Check Gramming at an e
4. Elevation reference mark used appears on FIRM: Yes X No (See Instructions on Page 4) 5. The reference level elevation is based on: XX actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference lescase this certificate will only be valid for the building during the course of construction. A post-construit be required once construction is complete.)	evel floor in place, in which truction Elevation Certificate
6. The elevation of the lowest grade immediately adjacent to the building is: \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	VD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
1. If the community official responsible for verifying building elevations specifies that the reference levis not the "lowest floor" as defined in the community's floodplain management ordinance, the elevations as defined by the ordinance is:	tion of the building's "lowest
FEMA Form 81-31, MAR 97 REPLACES ALL PREVIOUS EDITIONS SE	E REVERSE SIDE FOR CONTINUATION


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Kichard LICENSE NUMBER (or Affix Seal) CERTIFIER'S NAME TITLE **COMPANY NAME** ADDRESS STATE ZIP SIGNATURE Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner. Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in COMMENTS: Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within

seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-6350.

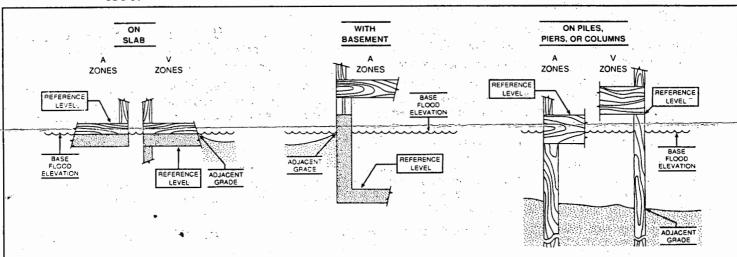

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.