FPUP 198-C/8-E-A Pate Issued:

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMEI AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999 Type 3 MHNGVD

SEE REVERSE SIDE FOR CONTINUATION

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

	FOR INSURANCE COMPANY USE						
BUILDING OWNER'S NAME		POLICY NUMBER					
STREET ADDRESS (Including And		lumber) OR RO. F	IOLITE AND DOYALINADED	.)	201711111111111111111111111111111111111		
STREET ADDRESS (Including Apr	COMPANY NAIC NUMBER						
OTHER DESCRIPTION (Lot and B	Slock Numbers etc.)	13/			•		
RI ALCO	ESTATES	100	797	T 115	D 1055 70		
CITY	C-3/84/62		<i>A12</i>	STATE	ZIP CODE		
TUSON		• • •		42	85603		
	SECTION B FL	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION			
Provide the following from the	ne proper FIRM (See	Instructions):					
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION		
040073	955	A	8/10/07	12	(in AO Zones, use depth)		
	/		0//7///	770	1/9/3/		
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): UNGVD 29 Uther (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate							
					or this building site, indicate		
the community's BFE:	teet N	GVB (or other	HIM datum-see Section	1 B, Item 7)	· ·		
	SECTIO	ON C BUILDI	NG ELEVATION INFORM	MATION			
(c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The final one) the highest grade level) elevated in accordance in accordance to the elevation data ander Comments on Pag	s at an elevation of beat an elevation and the highest grade and loor used as the refer adjacent to the build redance with the community system used in deception (NOTE: If the elegation of the elevation of the e	The bottom of the bottom to the bottom to the bottom ing. If no flood nunity's floodpletermining the elevation datument the elevation	of the lowest horizontal state of the lowest horizontal state of the NGVD (or other FIF nee level from the selected uilding. In the selected diagram is depth number is available ain management ordinant above reference level elem used in measuring the elem to the datum system united the state of the datum system united in the state of th	d diagram is diagram is diagram is diagram is diet is the building ce? Yes wations: NG vations is different in the FIRM	ection B, Item 7).		
5. The reference level eleva	tion is based on: V	actual constru	ection Construction d	rawings	. ~ .		
	tion drawings is only nly be valid for the bu struction is complete.,	valid if the build ilding during th)	ding does not yet have the ecourse of construction.	e reference level A post-construc			
Section B. Item 7).	or grade infinediately	aujacent to the	o boliding to.	10001110110	(c. onior r min datam coc		
	SI	ECTION D CO	MMUNITY INFORMATION	ON	•.		
If the community official rais not the "lowest floor" as defined by the o	s defined in the comr	nunity's floodpl	ain management ordinan	ce, the elevation			

SECTION E CERTIFICATION


This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a preperty owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

TC: 4300

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Joh	n H.	Stitzer		LS 4399			
CERTIFIER'S NAME Vice Pres.			LICENSE NUMBER (or Affix Seal) S & S Surveyeys				
245	South	Plumer #38	Tucson		Arizona 85719		
ADDRESS /	11 11 1	1	CITY		STATE		
alke	MAN	SOCIALIZATION OF THE PARTY OF T		Sept. 18,	1998 520-624-6466		
SIGNATURE	4.9 C	CAY CO		DATE	PHONE		
. <i>U</i> -	W AN	10 0					
Copies should	i be made of	this Certificate for:	1) community official,	2) insurance agent/co	mpany, and 3) building owner.		
COMMENTS:					ce requires in Article		
	XI that th	e botto #co f the st	ructural frame for a r	nanufactured home	or building be a		
	minimum of one toot above the base flood elevation listed in item 6 of Section B of this						
					is to be a minimum of		
			et above the base floo				
		. ,			-		
					2 (a) of Section C of		
			ertificate is to be cert		****		
	copy of tl	his form is to be re	eturned, within seven	days of placement	of the manufactured		
	home or l	building, to Pima	County Floodplain M	lanagement Section	, 201 N. Stone Ave		
: .		, O	01 Phone 740-6350		,		

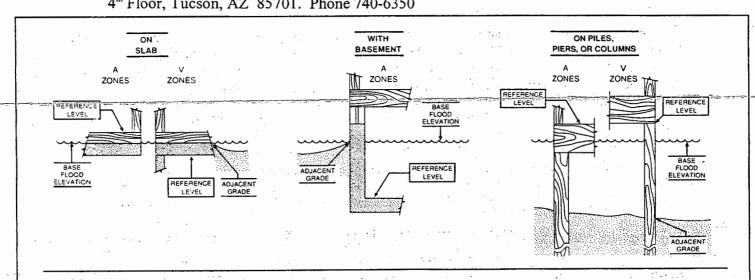

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.