FPUP_99-054E-A SPP

FPUP: #

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY

O.M.B. No. 3067-0077 Expires July 31, 1999 Type 2 CHDAG

Date Issued 2/23/99 NATIONAL FLOOD INSURANCE PROGRAM

Type 2 CHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUM Hayy W. Zorro	BER COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) Lax Codes 210-41-063B	T/5 Ry)2 \$21
CITY	STATE ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP	FIRM) INFORMATION
rovide the following from the proper FIRM (See Instructions):	
COMMUNITY NUMBER	IDEX 5. FIRM ZONE 6. BASE FLOOD ELEVATION
040073 64019CZBOOK K Feb. 8, 19	(in AO Zones, use depth)
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: Feet NGVD (or other FIRM datum—see Section B, Item 7).	
SECTION C BUILDING ELEVATION INFORMATION	
(b). FIRM Zones V1-V30, VE, and V (with BFE). The bettern of the lowest horized the selected diagram, is at an elevation of level NGVD (or of the selected diagram, is at an elevation of level). The floor used as the reference level from the below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagone) the highest grade adjacent to the building. If no flood depth number is level) elevated in accordance with the community's floodplain management and indicate the elevation datum system used in determining the above reference level comments on Page 2). (NOTE: If the elevation datum used in measuring the FIRM (see Section B, Item 7), then convert the elevations to the datum system.	portal structural member of the reference level from ther FIRM datum-see Section B, Item 7). Selected diagram is \(\text{LQ} \). \(\text{O} \) feet above \(\text{X} \) or gram is \(\text{LL} \). \(\text{L} \) feet above \(\text{D} \) or below \(\text{Check available, is the building's lowest floor (reference ordinance? \(\text{L} \) Yes \(\text{L} \) No \(\text{L} \) Unknown evel elevations: \(\text{L} \) NGVD '29 \(\text{L} \) Other (describe ing the elevations is different than that used on
equation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: Yes No (See Instruc	
5. The reference level elevation is based on: actual construction construction (NOTE: Use of construction drawings is only valid if the building does not yet case this certificate will only be valid for the building during the course of construit will be required once construction is complete.)	ction drawings nave the reference level floor in place, in which uction. A post-construction Elevation Certificate
6. The elevation of the lowest grade immediately adjacent to the building is. Section B, Item 7):	feet NGVD (or other FIRM datum-see
SECTION D COMMUNITY INFO	RMATION
1. If the community official responsible for verifying building elevations specifies to is not the "lowest floor" as defined in the community's floodplain management—floor" as defined by the ordinance is:	ordinance, the elevation of the building's "lowest"

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME

TITLE


COMPANY NAME

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

This certificate completed in Sections C and E is to be returned to Pima County

Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ. 85701 prior to B2/B3 inspection.

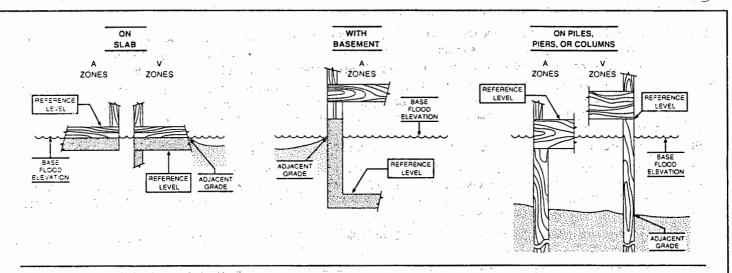

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.