T 1		\sim	00:		-	,
$-\nu$	11	ν	44-	18	7	17
11	U	1 <u>-</u>	99-	10	/E ~	٠, ٣
	•		201	•	. —	_

ELEVATION CERTIFICATE

PCFC JUN 2'99PM 2:09 O.M.B. No. 3067-0077

Expires July 31, 1999

Date Issued:

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

Type 1 MHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

	FOR INSURANCE COMPANY USE								
BUILDING OWNER'S NAME	Roberts				POLICY NUMBER				
STREET ADDRESS (Including Ap		lumber) OR P.O. F			COMPANY NAIC NUMBER				
OTHER DESCRIPTION (Lot and I	3lock Numbers, etc.) 139 - 33 -	25/B		T 15	R 13 S 18				
CITY		-		STATE	ZIP CODE				
	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	I				
Provide the following from the proper FIRM (See Instructions):									
1. COMMUNITY NUMBER 040073	2. PANEL NUMBER 01019C2810	3. SUFFIX	4. DATE OF FIRM INDEX Teb. Sh 1999	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)				
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): UNGVD '29 Uniter (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE. Uniter Section B, Item 7)									
	SECTION	ON C BUILDI	NG ELEVATION INFORM	IATION	<u></u>				
the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grade	is at an elevation of L BFE). The floor use the highest grade ac floor used as the refe adjacent to the build	d as the reference dijacent to the brence level from the ling. If no flood	feet NGVD (or other FIF nce level from the selecte uilding. 199 n the selected diagram is	tM datum see 5 d diagram is \(\text{New of } \) \(\text{D3} \) feet is the building	L.L feet above C or PLust N.H. heRe above C or below (check g's lowest floor (reference				
equation under Commer	ge 2). (NOTE: If the B, Item 7], then conve nts on Page 2.)	elevation datur ert the elevatio	n used in measuring the e ns to the datum system u _	elevations is diff sed on the FIRM	VD 29 Other-(describe erent than that used on and show the conversion				
Elevation reference mark The reference level elevation (NOTE: Use of construct case this certificate will owill be required once con	ation is based on: XX tion drawings is only nly be valid for the bu	actual construe actual construe valid if the build if the build in the	action construction d	rawings e <i>reference leve</i>					
6. The elevation of the lower Section B, Item 7).	est grade immediately	adjacent to th	e building is:	feet NGVE	or other FIRM datum-see				
7 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	s	ECTION D CO	DMMUNITY INFORMATION	NC					
	s defined in the comporting the comp	nunity's floodpl	ain management ordinan	ce, the elevatio	ndicated in Section C, Item 1- of the building's "lowest B, Item 7).				

PUP_99-187E-C

SECTION E CERTIFICATION

* h.

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME

LICENSE NUMBER (or Affix Seal)

TITLE

COMPANY NAME

ADDRESS

CITY

STATE

ZIP

SIGNATURE


DATE

PHONE

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-6350.

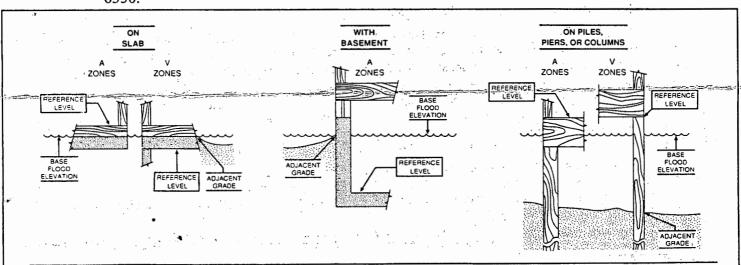

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.