FPUP 99-515E-A

P99CP08810

ELEVATION CERTIFICATE

Date Issued:

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

Type 1 MHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION

FOR INSURANCE COMPANY USE

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER
6249 W. Santa Pauls					•
OTHER DESCRIPTION (Lot and Block Numbers, etc.) T /S R /2 S /0					
CITY		•	•	STATE	ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
Provide the following from the proper FIRM (See Instructions):					
	·		L DATE OF SIDM INDEX	5. FIRM ZONE	C PACE ELOOD ELEVATION
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	· .	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
040073	2225	K	2/8/99	<u> 40</u>	1 1007
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): UNGVD '29 Uniter (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE. Uniter FIRM datum—see Section B, Item 7).					
SECTION C BUILDING ELEVATION INFORMATION					
of	idiling's reference lever AE, AH, and A (with Ext NGVD (or other FIR VE, and V (with BFE); is at an elevation of least an elevation used as the reference adjacent to the build ordance with the committee system used in diagraph of least an elevation of least an elevation of least and least an elevation of least and least an elevation least an elevation least an elevation of least and least an elevation elevation least an elevation elevation elevation least an elevation e	A datum-see The bottom I as the refere I acent to the trence level fro In an in floor I no floor I	of the reference level floor. Section B, Item 7). of the lowest horizontal so received from the selected diagram is didepth number is available of the lowest in measuring the lowest to the datum system is section.	tructural member RM datum-see Seed diagram is left to left is the building nce? Yes evations: X NG elevations is difficused on the FIRM	ed diagram is at an elevation of the reference level from section B, Item 7): Light feet above or above or below (check y's lowest floor (reference) No Unknown VD '29 Other (describe)
5. The reference level elever (NOTE: Use of construct case this certificate will owill be required once constructed. 6. The elevation of the lower	ation is based on: XX ction drawings is only nly be valid for the bu struction is complete.	actual constr valid if the bui ilding during ti)	uction construction of construction of course of construction.	drawings ne reference leve . A post-construc	I floor in place, in which ction Elevation Certificate
Section B, Item 7).					
			OMMUNITY INFORMAT	ION	·
is not the "lowest floor" a	as defined in the commercial i	nunity's floodp	NGVD (or other FIRM d a	nce, the elevation	indicated in Section C, Item 1- n of the building's "lowest r B, Item 7).

SEE REVERSE SIDE FOR CONTINUATION


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation Information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal) TITLE MARCO A ORTIZ COMPANY NAME N. SANTA PAULA RD Treson SIGNATURE Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner. Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in COMMENTS: Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-

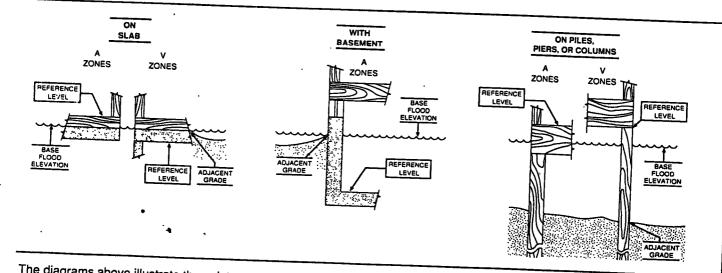

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.