FPUP99-543E-A

ELEVATION CERTIFICATE

O.M.B. No. 3067-0077 Expires July 31, 1999

Date Issued: 9-10-99 FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

Type 1 MHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 10502 N ARLINE RD					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and I	Slock Numbers, etc.)	LOT 1	<u> </u>		R /2 S 67
TUCSON				STATE A2	757
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
Provide the following from t	ne proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
040073	0995	K	2-8-99	A01	/ FOOT
8. For Zones A or V, where	no BFE, is provided o	n the FIRM, a	ase Flood Elevations (BFI and the community has estimated FIRM datum see Section	ablished a BFE-f	Other (describe on back) or this building site, indicate
	SECTION	ON C BUILD	ING ELEVATION INFORM	IATION	
the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest gradlevel) elevated in account and account to the comments on Pathe FIRM [see Section degratic der Comments on Pathe FIRM [see Section der Comments on Pathe Section der Comments on	VE, and V (with BFE) is at an elevation of the BFE). The floor use the highest grade at floor used as the reference adjacent to the build ordance with the computation of the build grade at the system used in a ge 2). (NOTE: If the B, Item 7], then convents on Page 2.)	d as the refered diacent to the larence level from the l	of the lowest horizontal state feet NGVD (or other FIF ence level from the selected building. In the selected diagram is did depth number is availabulain management ordinance above reference level elem used in measuring the cons to the datum system used.	d diagram is did diagram is did diagram is die, is the building ce? Yes devations: No elevations is different did did diagram is different did diagram did did did did did did did did did di	bove or below (check 's lowest floor (reference No Unknown VD '29 Other (describe brent than that used on
4. Elevation reference mar	k used appears on Fl	RM: 🗌 Yes	X No (See Instructions of	n Page 4)	
case this certificate will o will be required once cor	ction drawings is only only be valid for the bu astruction is complete	valid if the bui uilding during t .)	ilding does not yet have th he course of construction.	e reference leve A post-construc	tion Elevation Certificate
6. The elevation of the low Section B, Item 7).	est grade immediatel	y adjacent to tl	ne building is:	l.L. feet NGVD	-(or other FIRM datum-see
	S	ECTION D C	OMMUNITY INFORMATI	ON ,	
is not the "lowest floor"	as defined in the comordinance is:	munity's flood;	olain management ordinar NGVD (or other FIRM dat	ice, the elevation um-see Section	ndicated in Section C, Item 1- of the building's "lowest B, Item 7).

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation Information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide fleedplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

	, Section 1001,					
MASON ITOMOSONI CERTIFIER'S NAME	7/07 1-100	<u>.</u>				
PRESIDENT	LOU'S TRANSPORT					
P.O. Boy 32546	COMPANY NAME					
ADDRESS	CITY	AZ 85751				
Mary C Johnson	9-13-99	571-7955 ZIP				
	DATE	PHONE .				
Copies should be made of this Certificate	for: 1) community official, 2) insurance agent/comm	any and O' but the				

unity official, 2) insurance agent/company, and 3) building owner.

Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in COMMENTS: Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-6350.

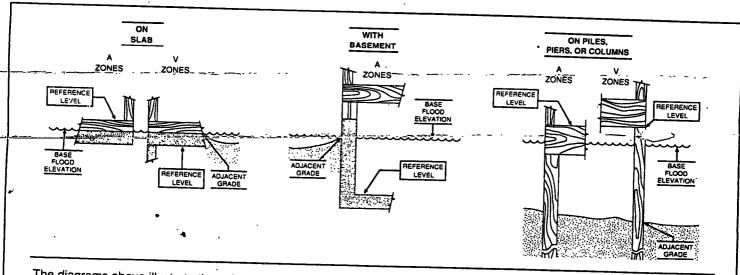

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.