FPUP_	99-9	597E-A
-------	------	--------

201 n. Stone

4th 8500

O.M.B. No. 3067-0077 Expires July 31, 1999

ELEVATION CERTIFICATE

Date Issued: 10/12/49 FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

Type 1 MHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.


	Instructions for c	ompleting this	form can be found on			
SECTION A PROPERTY INFORMATION PLFE I				PCFC FE	POR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME Mildred Roberts MR.					POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER	
	W. Los Real	20 #3				
OTHER DESCRIPTION (Lot and I	Stock Numbers, etc.) $5^{+}o + Co + 73$	•		T 15	R 13 S/8	
CITY				STATE	ZIP CODE	
lucson			<u>:</u>	AZ_	75746	
	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	· .	
Provide the following from t	he proper FIRM (See	Instructions):				
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION	
040073	751.	K	2.8.99	14.	(in AO Zones, use depth) I Foot Change &	
	28/0			AOI		
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): SOUND '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate						
	, .				or tries building site, indicate	
the community's BFE.						
	SECTI	ON C BUILDI	NG ELEVATION INFOR	MATION		
the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The one) the highest grad level) elevated in accordance to the elevation day, under Comments on Pa	VE, and V (with BFE) is at an elevation of the table to the highest grade at floor used as the reference adjacent to the build ordance with the compatum system used in a ge 2). (NOTE: If the B, Item 7], then convents on Page 2.)	d as the reference level from the barrence level from the barrence level from the barrence level from the flood munity's flood possible termining the elevation daturent the elevation	of the lowest horizontal state of the lowest horizontal state of the NGVD (or other FIF nee level from the selected building. In the selected diagram is a depth number is available lain management ordinar above reference level elem used in measuring the last to the datum system to	and datum—see S and diagram is and diagram is and feet a ale, is the building ance? Yes evations: NG elevations is differed on the FIRM	bove for below (check is lowest floor (reference No Unknown Un'29 Other (describe	
5. The reference level elev	ration is based on: XX ction drawings is only only be valid for the bu	actual constructions and actual construction a		Irawings <i>e reference leve</i>	l floor in place, in which ction Elevation Certificate	
6. The elevation of the low Section B, Item 7).	est grade immediatel	y adjacent to th	ne building is:		-(or other FIRM datum-see	
SECTION D COMMUNITY INFORMATION						
If the community official is not the "lowest floor" floor" as defined by the 2. Date of the start of constant is not the start	as defined in the comercial ordinance is:	munity's floodp	olain management ordinal NGVD (or other FIRM da	ice, the elevation	ndicated in Section C; Item 1- n of the building's "lowest B, Item 7).	

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. CERTIFIER'S NAM LICENSE NUMBER (or Affix Seal) TITLE COMPANY NAME **ADDRESS** SIGNATURE DATE Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner. Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in **COMMENTS:** Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-

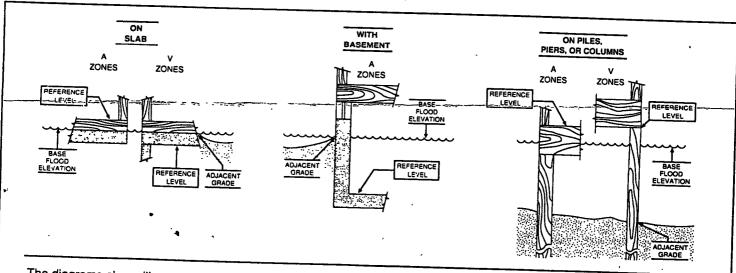

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.