FPUP_99-627E-A

ELEVATION CERTIFICATE

Date Issued:

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999 Type 1 MHDAG

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used oilly to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

	Instructions for co	ompleting this	form can be found on	the following p	ages.
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME					POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and	Slock Numbers, etc.)			т /5	D () () ()
					R (2 S/0
O9-19-01P12:26 RCVD STATE					. ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
Provide the following from the proper FIRM (See Instructions):					
1. COMMUNITY NUMBER	02 PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
040073	2225	K	2/8/99	40	1.0 fost
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate—the community's BFE. Liter NGVD (or other FIRM datum—see Section B, Item 7).					
SECTION C BUILDING ELEVATION INFORMATION					
(b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below in (check one) (d). FIRM Zone AO. The one) the highest grad level) elevated in accordance on Paragraphs on	et NGVD (or other FIF VE, and V (with BFE) is at an elevation of it BFE). The floor use the highest grade at floor used as the reference adjacent to the build ordance with the compatum system used in case 2). (NOTE: If the B, Item 7], then convents on Page 2.)	The bottom of th	Section B, Item 7): of the lowest horizontal significant of the lowest horizontal significant of the lowest horizontal significant in the selected diagram is discontinuous diagram is available in management ordinary above reference level elem used in measuring the lans to the datum system is	aructural member AM datum see S ad diagram is ble, is the building ace? Yes evations: NG elevations is differed on the FIRM	
5. The reference level elev (NOTE: Use of constru case this certificate will of will be required once con	ration is based on: XX ction drawings is only only be valid for the bunstruction is complete	actual constructions of the construction of th	uction construction of ding does not yet have the course of construction	drawings ne reference leve . A post-construc	I floor in place, in which tion Elevation Certificate (or other FIRM datum-see
Section B, Item 7).		, ,			
SECTION D COMMUNITY INFORMATION					
in and the "law of floor"	as defined in the com ordinance is:	munity's floodp	NGVD (or other FIRM da	tum-see Section	ndicated in Section C, Item 1 of the building's "lowest D, Item 7)

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation? Information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the Certification: In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement pay be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. NUMBER (or Affix Seal) COMPANY NAME SIGNATUR PHONE

se made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS:

Pima County Floodplain and Erosion Hazard Management Ordinance 1994-FC2 in Article XI requires the bottom of the structural frame of a manufactured home to be a minimum of one foot above the base flood elevation. For "A" or "AO" Zones Pima County requires the manufactured home floor reference level to be a minimum of one and one half feet above the bottom of the structural frame elevation which equals two and one half feet above the base flood elevation as listed in item 6 of Section B of this form. This elevation certificate is to be certified in Sections C and E. A copy is to be returned within seven days of placement of the manufactured home, to Pima County Floodplain Management Section, 201 N. Stone Ave., 4th Floor, Tucson, AZ 85701. Phone 740-

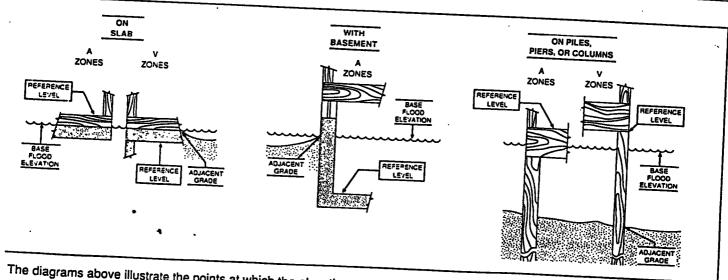

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.